

RAVENHILL STUDIO

2122 Cypress Ave, Los Angeles, CA 90065
323.977.8532, contact@ravenhillstudio.com

We recommend that a professional electrician install our Pearl Sconce Plug-In Fixture. Please share this guide with them and ensure they read the instructions completely before beginning assembly.

Your Pearl Sconce Plug-In Fixture comes packaged in (4) individual parts and packets:

(1) Pearl Sconce Plug-In Fixture

(1) Misc Contents Envelope

(1) G8 Lightbulb


Cord Grip Assembly (1)
Drywall Screws (3)
Drywall Anchors (3)

Included with your Pearl Fixture is one G8 LED Lightbulb.

The Lightbulb is JA8 certified and has a 15,000-hour lifetime.


G8 Lightbulb Only. 7W Max.

Your Pearl Fixture includes a Glass Shade, which is vulnerable to scratching or staining if care is not taken. Before installing or adjusting your Pearl fixture, it is highly recommended that you clean your hands or wear gloves and only adjust the Globe as described in the notes below. Failure to do so may result in scratches or stains.

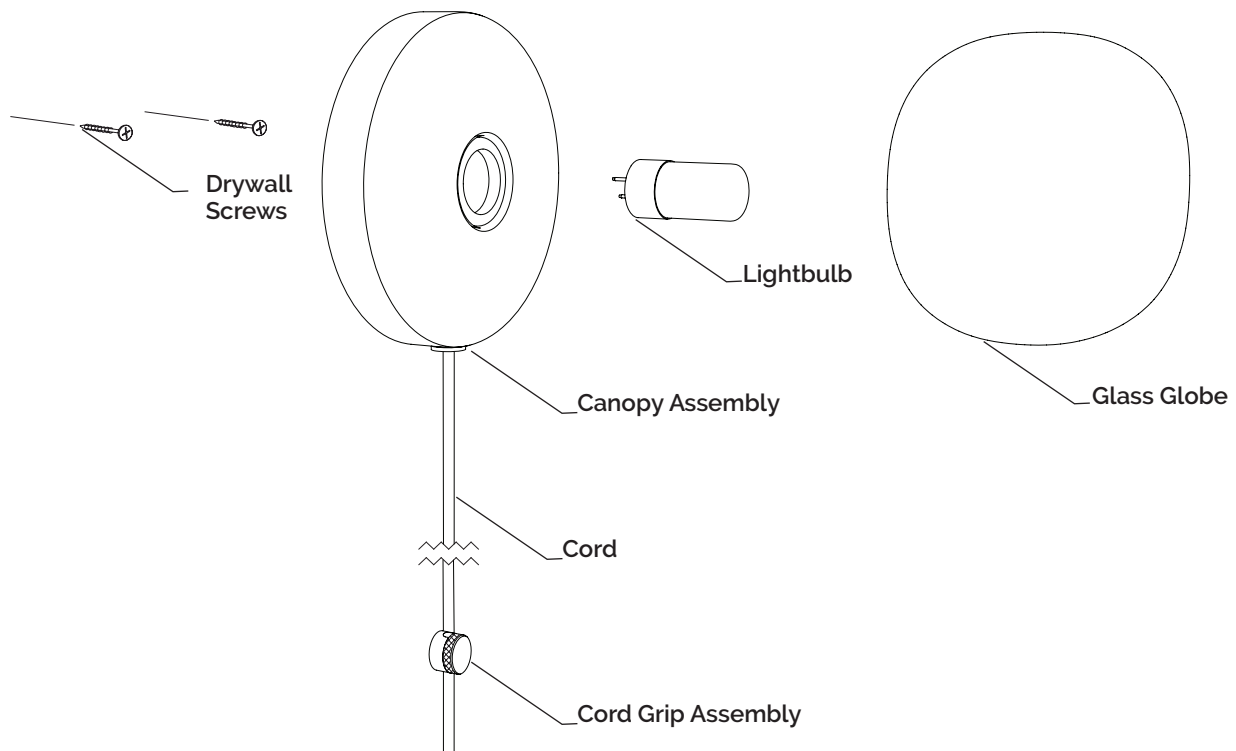


 **CAUTION:** Before starting, turn off power at main circuit power.


1. Unpack your box and open the miscellaneous contents envelope.
2. Safely set the Glass Globe and Lightbulb on a clean and level surface.
3. The Pearl Sconce Plug-In comes with the Mounting Plate attached to the Canopy. The keyhole slots are spaced 2" apart and are located 1.125" below the top and from the center of the canopy. Determine the desired mounting location for the Sconce, then mark the two screw locations on the wall. Use a level to ensure the marked holes are straight.
4. If using the Drywall Screws only, drill two pilot holes at the marked locations using a 3/32" drill bit. If using Drywall Anchors, drill two 1/4" holes at the marked locations, then gently ctap the anchors into the holes with a hammer.

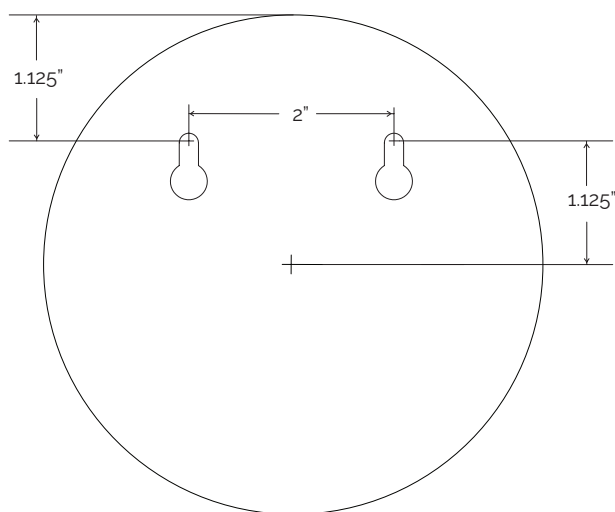

5. Use a screwdriver to drive the Drywall Screws into the wall, leaving a 1/16" gap between the back of each screw head and the wall to accommodate the keyhole slots on the Plug-In Sconce Backplate.
6. Bring the Sconce to the wall and align the keyhole slots so that they fit over the Drywall Screws and slide the Sconce down to secure against the wall. The Sconce should feel secure and not wobbly.
7. Plug in the Lightbulb.

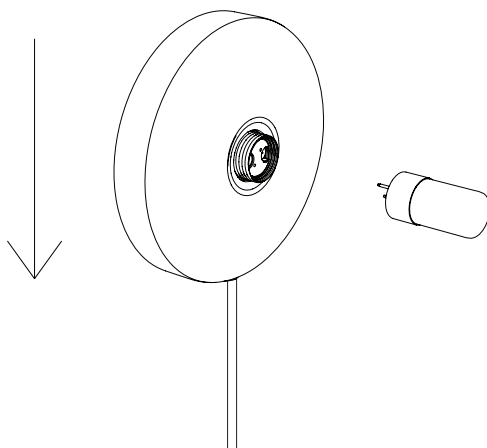


8. Carefully slide the Glass Globe over the Lightbulb, thread the Globe onto the Tech Assembly, and tighten it to the desired orientation. The rubber will allow for small adjustments to orientation, but care must be taken not to overtighten. Loosening the Globe might in some cases may be the best way to achieve the desired orientation.

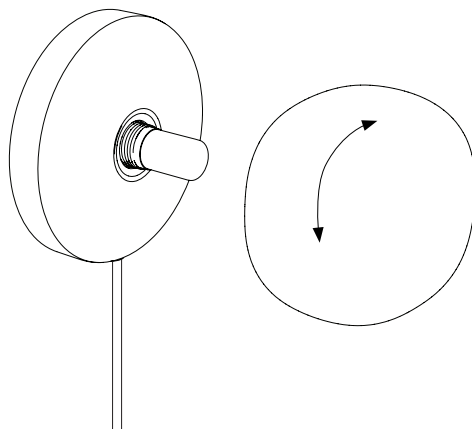

9. Determine the best position for the Cord Grip and fasten it to the wall with the enclosed Drywall Screws and optional Drywall Anchor. The Cord Grip is typically positioned directly below the Sconce and as close to the floor as possible.

Unscrew the two Cord Grip halves before fastening. Secure the back half of the Cord Grip to the wall, ensuring the slot is oriented in the desired direction of the electrical cord. Once secured, place the electrical cord into the Cord Grip, pull the cord taut to straighten it, and screw on the Cord Grip cap to secure.

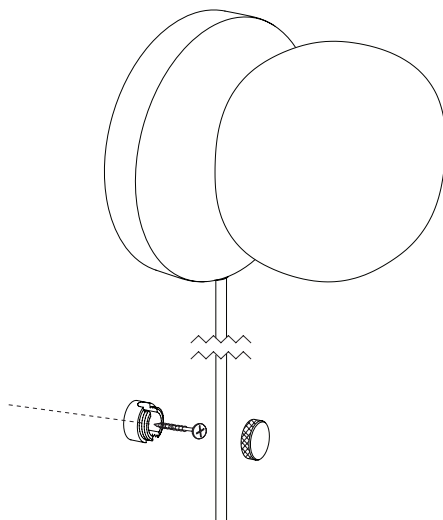

10. Plug in and enjoy!

NOTES / TROUBLESHOOTING

The Glass Globe on your Pearl fixture allows adjustment to orientation. To adjust the Glass Globe just rotate clockwise or counterclockwise to achieve desired orientation.

Due to the delicate nature of the Glass Globe and Canopy, it is highly recommended to clean your hands (and consider wearing gloves) before installing or adjusting your Pearl fixture.

Care should be taken to make sure the Lightbulb does not come off when removing the Glass Globe. Should this happen the bulb can be removed with pliers.

To clean your Glass Globe, compressed air is recommended to blow away dust and dirt particles. A damp microfiber cloth can be used for additional cleaning.

If installing a Pearl Sconce Plug-In, it might be necessary to adjust the gap between the Mounting Screw head and the wall, to ensure the Mounting Plate fits securely.