

## BEAM PENDANT 46

The Beam Pendant is our take on the classic typology of shop lamps. Using LED arrays as our jumping off point, we explored linear manufacturing processes to arrive at our material palette of plywood, extruded aluminum and rolled acrylic. We join and shape these materials into a fixture with angled sides and rounded ends that imply movement and directionality.

Available in two lengths and finish options, Beam is equally at home in a dining room or a conference suite. In Opal acrylic the translucent shades provide a warm, refracted light, while in Oak plywood the opaque shades direct and bounce light downwards.

**RAVENHILL STUDIO**

323.977.8532  
contact@ravenhillstudio.com

### DIMENSIONS/ WEIGHT

46" x 6.5" x 5.5", 8 lbs

### DROP HEIGHT

8' Flexible Cord and Brass Aircraft Cable, one J-Box required

### BULB/ TECHNICAL SPECS

Warm-White integrated LED 40W  
2700K standard, 3000K, 3500K, &  
Warm Dim upon request  
90+ CRI, LED lifespan 50k hours  
Oak 2180 Lumens standard  
Opal 2740 Lumens standard

### J-BOX SPECS

Connects with ceiling J-Box  
with ceiling cutout under 5" DIA,  
J-Box should be mounted 18" off  
fixture center

### VOLTAGE

120V/277V  
220V upon request

### FINISH OPTIONS


Oak  
Opal

### CERTIFICATION

UL Listed, cUL  
Damp Rated  
CE Listed upon request

### DRIVERS & DIMMABILITY

ELV Dimmer Recommended  
Dims to 10%  
0-10V Dimming Upon Request  
Recommended ELV Models:  
Lutron Maestro: MAELV-600  
Lutron Diva: DVELV-300P  
Lutron Skylark: SELV-300P

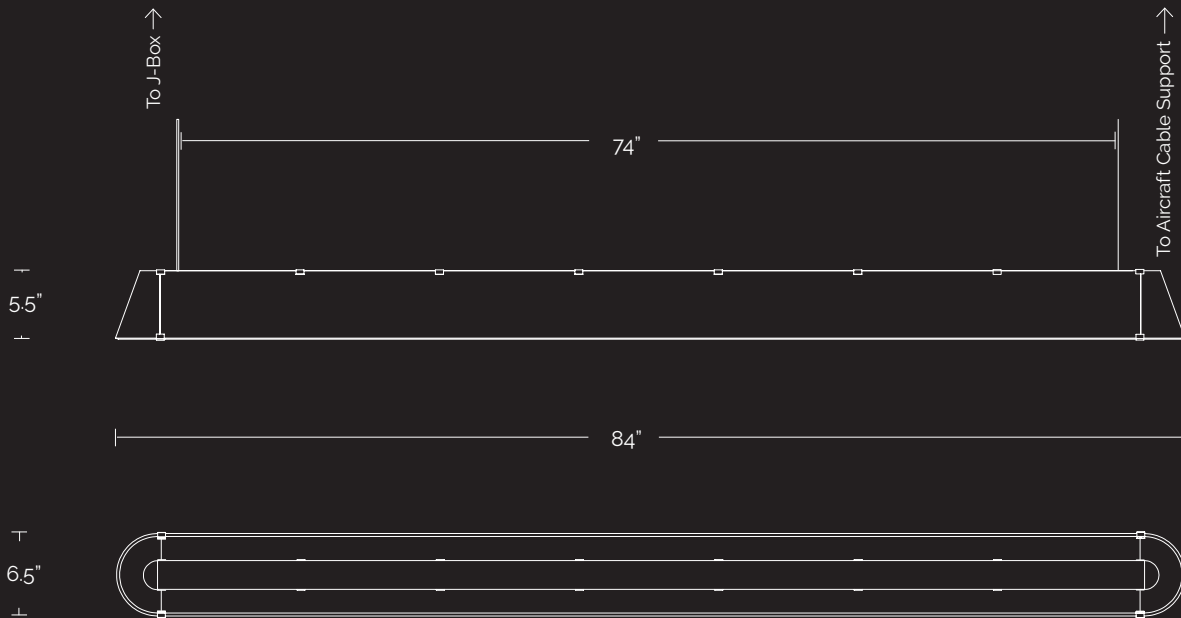

## BEAM PENDANT 84

The Beam Pendant is our take on the classic typology of shop lamps. Using LED arrays as our jumping off point, we explored linear manufacturing processes to arrive at our material palette of plywood, extruded aluminum and rolled acrylic. We join and shape these materials into a fixture with angled sides and rounded ends that imply movement and directionality.

Available in two lengths and finish options, Beam is equally at home in a dining room or a conference suite. In Opal acrylic the translucent shades provide a warm, refracted light, while in Oak plywood the opaque shades direct and bounce light downwards.

### DIMENSIONS/ WEIGHT

84" x 6.5" x 5.5", 18 lbs

### DROP HEIGHT

8' Flexible Cord and Brass Aircraft Cable, one J-Box required

### BULB/ TECHNICAL SPECS

Warm-White integrated LED 90W  
2700K standard, 3000K, 3500K, &  
Warm Dim upon request  
90+ CRI, LED lifespan 50k hours  
Oak 4360 Lumens standard  
Opal 5480 Lumens standard

### J-BOX SPECS

Connects with ceiling J-Box  
with ceiling cutout under 5" DIA,  
J-Box should be mounted 37" off  
fixture center

### VOLTAGE

120V/277V  
220V Upon Request

### FINISH OPTIONS

Oak  
Opal

### CERTIFICATION

UL Listed, cUL  
Damp Rated  
CE Listed upon request

### DRIVERS & DIMMABILITY

ELV Dimmer Recommended  
Dims to 10%  
0-10V Dimming Upon Request  
Recommended ELV Models:  
Lutron Maestro: MAELV-600  
Lutron Diva: DVELV-300P  
Lutron Skylark: SELV-300P